

# 22.6" Automatic & Semi-Automatic Double Column Bandsaws



Shown with optional Roller Table



## H550A Features:

- ▶ Automatic cutting cycle synchronized with an automatic barfeed mechanism and stock clamping action
- ▶ Precise cut off length setting, with digital readout, is calibrated in .01" increments
- ▶ Cutting Piece Counter, is used to preset the number of the pieces cut
- ▶ Multiple stroke preset counter for cutting lengths longer than 19.7", max 9 strokes

## H550SA & H550A Features:

- ▶ Infinitely variable blade speed
- ▶ Low voltage controls
- ▶ Hydraulically controlled cutting feed maintains a constant cutting rate
- ▶ Power-driven brush continually flushed by cutting fluid
- ▶ Automatic blade shut-off at end of cut
- ▶ Auto head quick approach and elevation control
- ▶ 1-1/2" wide blade
- ▶ Solid carbide blade guides with rollers
- ▶ Coolant application through both guides
- ▶ Hydraulic band tension control
- ▶ Quick-Action hydraulic twin-vice, split vice allows cuts to within 2" of bar end
- ▶ Two (2) Year Limited Warranty

## Cutting Capacities:

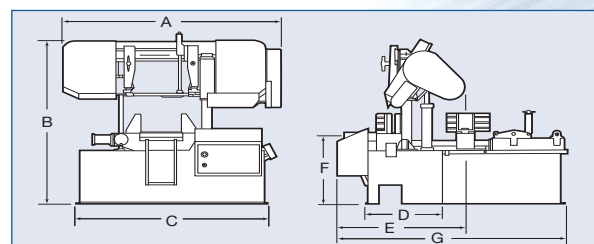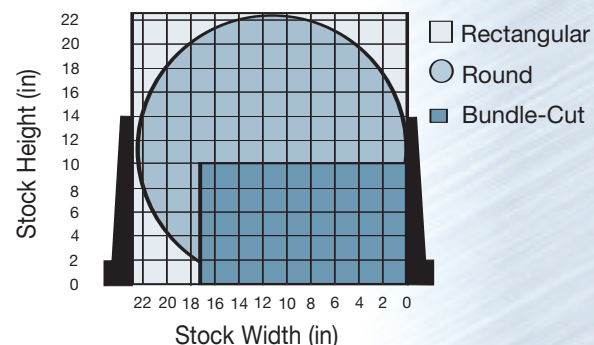

Model	H550A	H550SA
Drive Motor*	7.5 hp, 230/460v 3 ph	7.5 hp, 230/460v 3 ph
Hydraulic Motor	2 hp	2 hp
Coolant Motor	1/8 hp	1/8 hp
Hydraulic oil capacity	17 gal.	17 gal.
Bandwheel Dia.	23.6"	23.6"
Blade Speeds	65-260 fpm	65-260 fpm
Blade Size	1-1/2" x .051" x 19'-3/8"	1-1/2" x .051" x 19'-3/8"
Coolant	Recirculating	Recirculating
Coolant Capacity	16.9 gal.	16.9 gal.
Cutting Capacity		
Round	22.6"	22.6"
Rectangular	23.6"W x 22.6"H	23.6"W x 22.6"H
Bundle Cutting**	17"W x 10"H	-
Feed Length/Index	19.7"	-
Max. Feed (9 times)	177.3"	-
Width (A)	112.2"	112.2"
Height (B)	86.1"	86.1"
Base Width (C)	91.4"	91.4"
Base Depth (D)	46.1"	46.1"
Depth (E)	52.17"	52.17"
Bed Height (F)	27.6"	27.6"
Depth (G)***	96.5"	-
Net Weight***	7,959 lbs.	5,500 lbs.
Shipping Weight***	9,502 lbs.	6,600 lbs.

\*Other voltages optional \*\*With optional Bundle Clamp

\*\*\* Depth with optional infeed roller table Specifications are subject to change without notice